


Patented "Snap-Lock" Cap

RANCH FENCE PRODUCT DATA SHEET

Approved by  Underwriters Laboratories Inc.

PRODUCT DESCRIPTION

Basic Use: To help provide security and /or containment for agricultural, residential, industry, highway, institutional, recreational and utility applications.

Composition:




- Co-extruded rigid Polyvinyl Chloride (PVC) specially formulated with 10 parts per 100 TiO2 for UV resistance in outdoor applications.
- Non Chalking Compound
- Impact Resistance (ft.lbs./in. of notch) = 23.5
- Tensile Strength (psi) = 6606

Materials:

- Posts are to be installed 8' on center and are available pre-routed in two, three and four rail systems for both 1-1/2" x 5-1/2" and 2" x 6" rails with 5', 6', 7', 7.5' and 8' high posts.
- Custom rail spacing, number of rails and post lengths available.
- Rails are available in 1-1/2" x 5-1/2" and True 2" x 6" sizes in 16' and 8' lengths.
- Caps are available in a Patented "Snap-Lock" outside design. Decorative upgrade caps available as well.

WARRANTY

Vinyl Solutions Incorporated warrants its vinyl fencing with a **LIFETIME, Non-Prorated Warranty** against manufacturing defects in workmanship and materials that result in corroding, blistering, peeling, flaking, rusting and abnormal weathering and discoloration subject to normal and proper use.

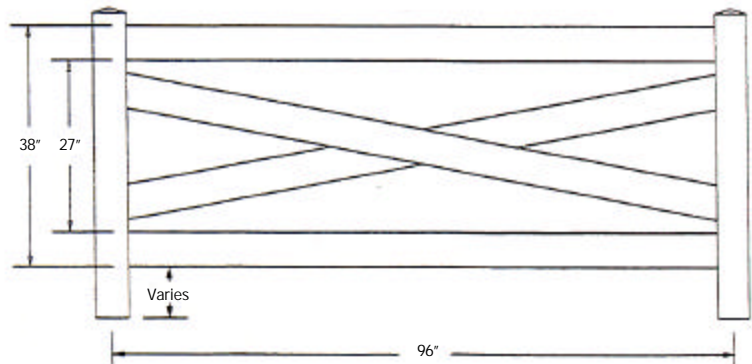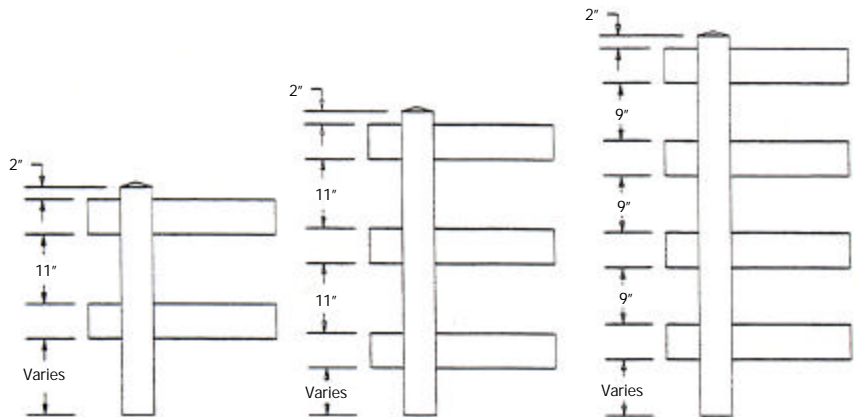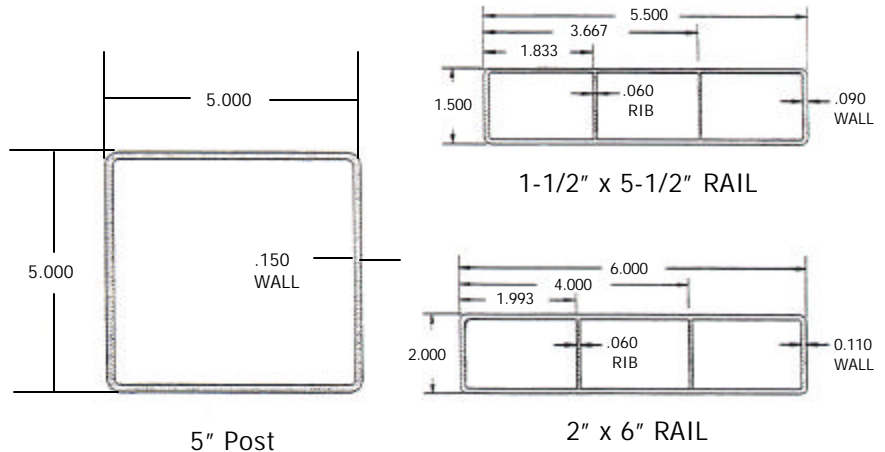

CROSS BUCK